





















推奨スポーク長一覧

作成:2025.6.25 (株) グロータック

					対象ハブ：EQUAL DISC ハブ				計算値				偶数長さでの推奨			
		Type	GROWTAC Model No	ERD (mm)	Offset (mm)	Height (mm)	Spoke holes	組み方	後左 Spoke (mm)	後右 Spoke (mm)	前左 Spoke (mm)	前右 Spoke (mm)	後左 Spoke (mm)	後右 Spoke (mm)	前左 Spoke (mm)	前右 Spoke (mm)
1		700C Tubeless ready Offset holes 370g ± 15g	RMCD-292230-A	579	2.5	30	24	2クロス	279.6	278.4	280.2	279.9	280	278	280	280
2		700C Tubeless ready Offset holes 400g ± 15g	RMCD-292240-A	559	2.5	40	24	2クロス	269.6	268.4	270.3	269.9	270	268	270	270
3		700C Tubeless ready Offset holes 440g ± 15g	RMCD-292250-A	539	2.5	50	24	2クロス	259.7	258.5	260.3	260.0	260	258	260	260
4		700C Tubeless ready 370g ± 15g	RMCD-292230-G	579	0	30	24	2クロス	279.6	278.4	280.2	279.9	280	278	280	280
5		700C Tubeless ready 400g ± 15g	RMCD-292240-G	559	0	40	24	2クロス	269.6	268.4	270.3	269.9	270	268	270	270
6		700C Tubeless ready 440g ± 15g	RMCD-292250-G	539	0	50	24	2クロス	259.7	258.5	260.3	260.0	260	258	260	260
7		27 inch Tubular 290g ± 15g	RMCD-280030-B	579	0	30	24	2クロス	279.9	278.2	280.0	280.2	280	278	280	280
8		650B Tubeless ready Offset holes 360g ± 15g	RMCD-302430-C	540	2.8	30	24	2クロス	260.2	259.0	260.8	260.5	260	258	260	260
9		27 inch Tubular 290g ± 15g	RMCD-250030-B	580	0	30	24	2クロス	280.4	278.7	280.5	280.7	280	278	280	280
10		27 inch Tubular 335g ± 15g	RMCD-250040-B	559	0	40	24	2クロス	269.9	268.2	270	270.3	270	268	270	270
11		27 inch Tubular 360g ± 15g	RMCD-250050-B	540	0	50	24	2クロス	260.5	258.7	260.5	260.8	260	258	260	260
12		700C Hookless Tubeless ready Offset holes	RMCD-302530-E	579	2.8	30	24	2クロス	279.6	278.4	280.3	279.8	280	278	280	280
13		700C Tubeless ready Offset holes	RMCD-292230-D	579	2.5	30	28	3クロス	285.7	284.8	285.6	286.0	286	284	286	286
14		700C Tubeless ready Offset holes	RMCD-292240-D	559	2.5	40	28	3クロス	275.8	274.9	275.7	276.1	276	274	276	276
15		700C Tubeless ready Offset holes	RMCD-292250-D	539	2.5	50	28	3クロス	265.9	265.0	265.8	266.2	266	264	266	266
16		700C Tubeless ready	RMCD-292230-H	579	2.5	30	28	3クロス	285.7	284.8	285.6	286.0	286	284	286	286
17		700C Tubeless ready	RMCD-292240-H	559	2.5	40	28	3クロス	275.8	274.9	275.7	276.1	276	274	276	276
18		700C Tubeless ready	RMCD-292250-H	539	2.5	50	28	3クロス	265.9	265.0	265.8	266.2	266	264	266	266
19		700C Hookless Tubeless ready Offset holes	RMCD-302530-F	579	2.8	30	28	3クロス	285.7	284.9	285.7	286.0	286	284	286	286

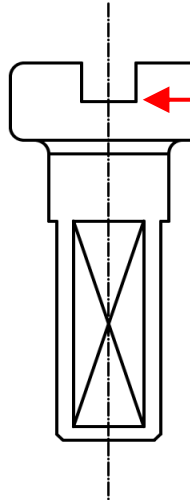

推奨スポーク長はニップルの溝底辺を狙い値としています。
スポーク、リムの誤差により±1mm程度の誤差が生じます。

